



EK SPEC 130 Cu-profile, Soft



1 Dimensions

	Min.	Max.
Width (mm)	3	40
Thickness (mm)	1	18
Area (mm ²)	3	400

Examples of different types of profiles that we have manufactured

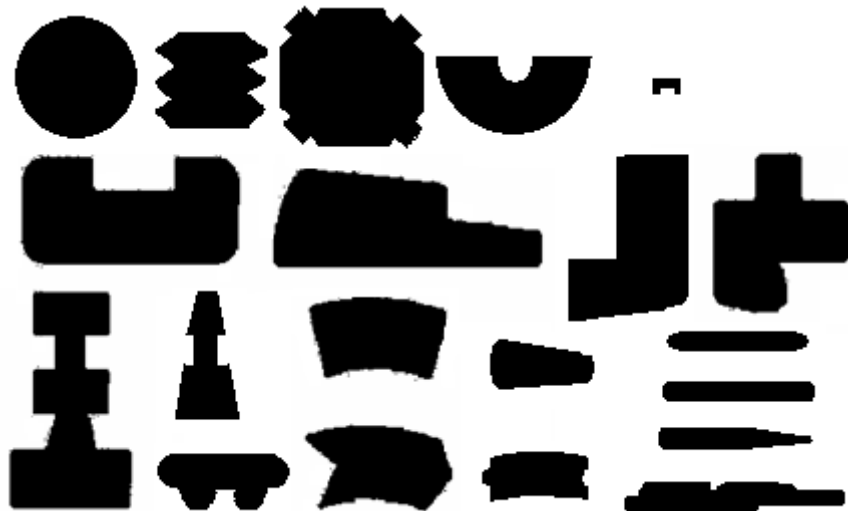

2 Tolerance of Dimensions

According to agreement.

3 Form of delivery

Packing	Approx Capacity (kg)
GL 800	800
VKT1250	3500

Other forms of delivery and types of package can be made by agreement.

4 Requirements

Copper Cu-ETP, R200
 Density: 8.93 g/cm³
 Oxygen: max 600 ppm
 Resistivity: max. 17.24 nΩm
 Tensile Strength: R_m 220-260 N/mm²

5 References

EN 13601 Copper and copper alloys - Copper rod, bar and wire for general electrical purposes

Author: Hill, Tony
 Documentno: 0167

Approved by: Ciardi, Jonas
 Issue: 3

Approved: 2019-04-16